THIN FILM MAGNETIC SENSOR

LOCKHEED CALIFORNIA COMPANY

BURBANK, CALIFORNIA, U.S.A.

AD733702

D D C
RECEIVED
DEC 13 1971
B

DOCUMENT CONTROL DATA - R & D

Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified

1. ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Lockheed-California Company Burbank, California	Unclassified
	2b. GROUP ----

3. REPORT TITLE

Thin Film Magnetic Sensor - Final Report

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)
Final Report - Phase I

5. AUTHOR(S) (First name, middle initial, last name)

Frank J. Fuller

6. REPORT DATE	7a. TOTAL NO OF PAGES	7b. NO OF REFS
30 September 1971	65	2

8a. CONTRACT OR GRANT NO	9a. ORIGINATOR'S REPORT NUMBER(S)
N00014-71-C-0298	LR 24792
b. PROJECT NO.	
NR 220-038/02-17-71	
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d.	

10. DISTRIBUTION STATEMENT

Approved for Public Release; Distribution Unlimited.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
	Office of Naval Research (Code 461) Department of the Navy Arlington, Virginia 22217

13. ABSTRACT

This final report covers the work conducted under this first phase of the above contract for ONR. The objectives were two-fold: (1) Comparison tests of a thin film sensor and the present production aircraft magnetic anomaly detector (MAD) the AN/ASQ-81. (2) Preliminary tests of the basic concept of three axis sum/square motion compensation.

The results of this program indicated first task feasibility toward a small, low power, motion compensated sensor. A rod sensor was utilized in lieu of a thin flat chip element because it provided free magnetic pole characteristics, a simplified method for 3-axis symmetry, more probable mechanical reliability, and mutually independent sensor operation.

Comparison testing indicated a thin film sensor performance, as expected, below ASQ-81 performance of the order of one quarter the range. However, data presented indicates a range ratio probability of one-half or better. The results of the 3-axis motion compensation tests using arithmetical computation of the sum/square function produced a motion compensated output.

KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Thin Film Magnetic Sensor						
Magnetic Sensor						
Thin Film Sensor vs ASQ-81						
Comparison MAD Detectors						
Motion Compensation						
3-Axis Motion Compensation						

DD FORM 1 NOV 65 1473 (BACK)

(PAGE 2)

LOCKHEED CALIFORNIA COMPANY

REPORT NO. _____LR 24792_____

DATE _____30 SEPTEMBER 1971_____

MODEL. _____

COPY NO. **000027**

FINAL REPORT

TITLE **THIN FILM MAGNETIC SENSOR**

REFERENCE _____ONR CONTRACT AUTHORITY NR 220-038/02-17-71_____

CONTRACT NUMBER (S) _____N00014-71-C-0298_____

PREPARED BY _____*F. J. Fuller*_____

F. J. Fuller
Principal Investigator

THIS RESEARCH WAS
SPONSORED BY:

APPROVED BY _____*T. G. Shaw*_____

T. G. Shaw - Group Engineer
Development, Avionics Laboratory

OFFICE OF NAVAL RESEARCH
AERONAUTICS, CODE 461
ARLINGTON, VA. 22217

APPROVED BY _____*D. E. Walters*_____

D. E. Walters
ASW R and D Systems Engineer

APPROVED BY _____*D. A. Unger*_____

D. A. Unger - Dept. Engineer
Avionics Laboratory

APPROVED BY _____*D. R. Meyer*_____

D. R. Meyer - Division Engineer
Avionic Systems Division

DDC

DEC 13 1971

B

LOCKHEED
CALIFORNIA COMPANY

i

THIN FILM MAGNETIC SENSOR
FOREWORD/ABSTRACT

This report describes the work conducted under the Thin Film
Magnetic Sensor research program executed for the Office of
Naval Research under Contract N00014-71-C-0298. This contract
calls for comparison tests using a single axis thin film sensor
and the AN/ASQ-81 Magnetic Anomaly Detector plus preliminary tests of
the basic three axis sur./square motion compensation concept. The
results of this program indicate first task feasibility toward a
small, low power, motion compensated . sor.

The sum/square motion compensation concept was based upon a
common phase reference for excitation of three mutually perpen-
dicular sensors; this concept dictated the use of an externally
pumped thin film sensor for the sensitivity comparison testing
under this contract.

A rod sensor was utilized in lieu of a thin flat square chip
element because it provides free magnetic pole characteristics,
a simplified method for 3-axis symmetry, more probable
mechanical reliability, and mutually independent sensor operation;
all of these characteristics are required for either compass or
MAD applications of a final 3-axis motion compensated sensor
configuration.

Comparison testing indicated that at this early stage of externally
pumped rod development, sensor performance is as expected below
ASQ-81 performance; i.e., a nominal thin film to ASQ-81 range

LOCKHEED
CALIFORNIA COMPANY

ratio of 1/4. However, data presented herein indicates in terms of achieved square chip performance a range ratio probability on the order of 1/2 or better. The high and variable characteristics of environmental noise in the Burbank area (air traffic, surface traffic, plant and industrial noise sources) precluded accurate comparisons of system performance. Numerous shutdowns occurred because of AN/ASQ-81 production installation tests. No thin film failures occurred; however, thin film performance varied because of the environmental noise and the critical operation of the unshielded high impedance pump presently used. For these reasons, the comparison testing in Burbank was made on the basis of signal to noise ratio comparisons while minimum discernible (MDS) range comparisons were made at the Rye Canyon Research facility because of its more secluded and relatively quiet environment.

The fundamental concept (3-axis sum/square motion compensation) was tested using the AN/ASA-65 rod system since it was available, is a standard unit in production, would meet the basic common pump phase reference requirement, and because it would simulate the feasibility of the concept. The results of these tests indicated concept validity. Mutually independent sensor operation provided the necessary phase trigonometric relations among the three sensor rod outputs. As a result, arithmetical computation of the sum/square function produced a motion compensated output while the individual sensor outputs showed typical sine function response as a function of orientation angle.

The intent of the contract for basic comparison and motion compensation objectives were met during the program. Further,

LOCKHEED
CALIFORNIA COMPANY

since reliability problems were a source of concern in ASQ-81 production programs, some of the originally planned comparison testing time was applied towards more detailed test data on electronic squaring circuitry, pump noise sources, rod sensor refinements and pump noise reduction.

LOCKHEED

T A B L E   O F   C O N T E N T S

LOCKHEED
CALIFORNIA COMPANY

LR 24792

TABLE OF FIGURES

LOCKHEED
CALIFORNIA COMPANY

TABLE OF FIGURES (Cont)

LOCKHEED
CALIFORNIA COMPANY

BLANK PAGE

INTRODUCTION

This report describes the work conducted under the ONR "Thin
Film Magnetic Sensor" contract N00014-71-C-0298. The fundamental
objectives of the contract were attained. The objectives
being: (1) comparison tests in different noise environments
between the AN/ASQ-81 P-3C and S-3A MAD (Magnetic Anomaly
Detector) and the thin film sensor and (2) initial three axis
sum/square motion compensation feasibility tests.

Comparison tests were conducted on the field of the Hollywood-
Burbank airport and also at the Lockheed Rye Canyon Research
Facility Magnetics Laboratory area. Both series of tests were run at
different periods of the day and night and at various heights off
the ground to permit a wide variance in the noise environment.

The following pages of this report depict the test facilities
and setups used in this program, sensitivity comparison data,
3-axis sum/square data, results of other tests conducted,
conclusions and recommendations.

LOCKHEED
CALIFORNIA COMPANY

TEST FACILITIES

The Rye Canyon field test setup used in this program is shown
in Figure 1 with an insert of a closeup of the test units in
the upper right hand corner. The cylindrical configuration
is the AN/ASQ-81 and the three axis thin film rod sensor is shown
next to the ASQ-81 sensor head. All structures and fixtures used
were of non-magnetic materials. Figure 1 also shows the ASQ-81
compensation coil setup on the ground below the sensors and
a gamma slinger (rotating magnetic with a rated moment of
1045 c.g.s. units) in the foreground. Appendix A includes
related test setup photographs illustrating the various
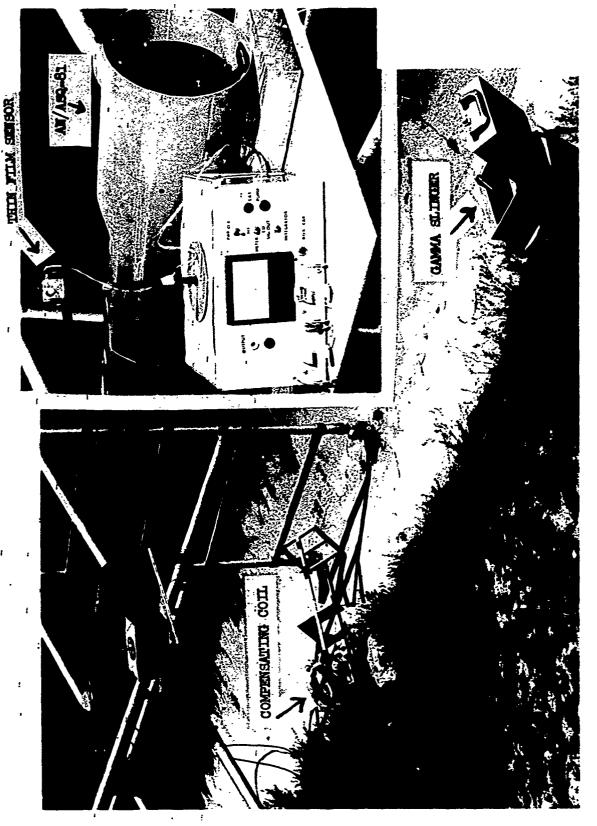Burbank and Rye Canyon facilities used in this program.

LOCKHEED
CALIFORNIA COMPANY

FIGURE 1. LOW HEIGHT FIELD FIXTURE (RYE CANYON TEST FACILITY)

SENSITIVITY COMPARISON TEST DATA

The sensitivity comparison data taken were reasonably consistent
although there were considerable variance in the data. Figures
2 and 3 illustrate Burbank gamma slinger data in which the
ASQ-81 shows at a distance of 20 feet a signal to noise ratio
approximately equal to that of the thin film at 5 feet. This
implies a thin film to ASQ-81 range ratio of a little better
than 1/4. For the thin film, the peak-to-peak response at
5 feet was quite discernible whereas 10 feet shows a non-
discernible response; therefore, it is apparent from these
tests that the thin film rod minimum discernible range lies between
5 and 10 feet. On the other hand, the ASQ-81 showed significant
differences between responses at 3 P.M. and at 4 P.M.. The 20
foot ASQ-81 data indicates a signal to noise ratio which on the
basis of cube law physics would not extrapolate much beyond
the 20 foot reliable range. While an ASQ-81 temperature
failure prevented continuation of this particular test, it was
obvious that the relative range ratio is better than 1 to 4.

Because of the difficulty of analytically relating these data
to cube law principles, a series of tests were run to check
how the outputs of both systems varied with respect to environmental
noise. Figures 4 through 8 show ASQ-81 response to environmental
noise variations while the thin film shows no such response.
These results indicated the difficulty of true relative system
sensitivity comparisons in the high level Burbank noise
environment. Further, comparisons tended to distort the true
capability of the ASQ-81 and indicated the need for quiet
environment testing. However, some additional gamma slinger

LOCKHEED

4

tests were run in the Burbank area when such tests did not
interfere with ASQ-81 production testing. Figure 9 is an
example which shows considerably better thin film signal to
noise ratio at 5 feet than illustrated in Figure 2; this
particular test was curtailed however, because of ASQ-81
failure and subsequent production testing.

Figure 10 illustrates typical submarine model track test data
taken from runs conducted on the Target Model Track Test
Facility. The thin film was approximately at minimum discernible
signal (MDS) while the ASQ-81 provided a signal to noise ratio
of 40/2 or 20 to 1. Thus, the relative signal to noise ratio
superiority of the ASQ-81 was, for these tests, 20 to 1 which
in accordance with the cube law provides a relative thin film
to ASQ-81 range ratio of about 1 to 2.7. Attempts to conduct further
tests on the track at different model ranges at this time were
aborted because of ASQ-81 production aircraft problems. Because
of the difficulty in securing additional data caused by Burbank
production testing for delivery aircraft and the need for a
quiet environment, the testing was transferred to Rye Canyon.

Rye Canyon test procedures were compromised by continuing ASQ-81
reliability requirements for production testing. However, tests
were conducted when schedules permitted. No thin film failures
occurred so this was not a factor.

Figures 11, 12, and 13 show a low but significant variance in
thin film performance with the gamma slinger turned on and off
at   distances up to 5 feet. The ASQ-81 was turned on but showed
no response; a series of tests showed that because of interference
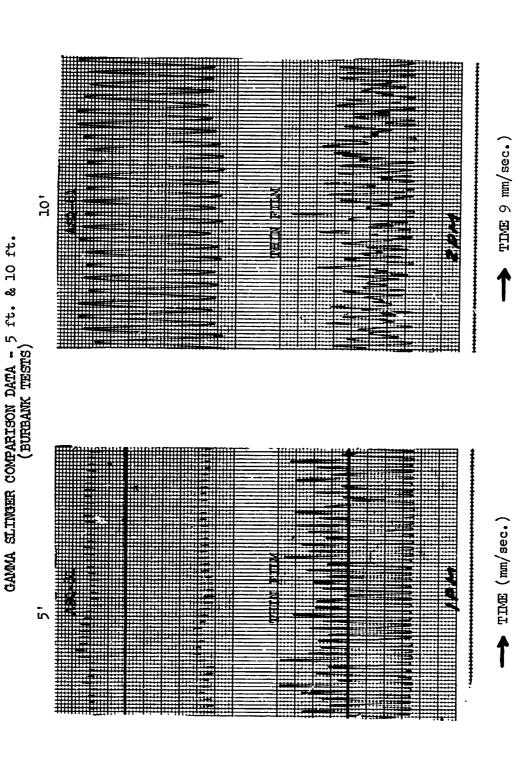
LOCKHEED
CALIFORNIA COMPANY

the thin film sensor had to be placed at least 2 feet from the
ASQ-81 sensor head in order to secure proper ASQ-81 operation
and this 2 feet was used on all subsequent tests.

In Figure 14 the ASQ-81 shows very erratic performance at 30 feet,
but discernible performance at 16 feet and the thin film not at
all. Figure 15 shows erratic but discernible ASQ-81 performance
at 18 and 21 feet. Figures 16 and 17 show a minimum discernible
ASQ-81 range of 24 feet. On the basis of Figure 13 thin film MDS at 6 feet
this indicates a relative range ratio of $6/24 = 1/4$. However,
it is apparent that even in the less noisy Rye Canyon environment
the data is still statistically noisy.

The data taken with the gamma slinger and the thin film sensor
mounted on the maneuver boom above ground inside the balloon,
and shown in Figure 18, shows a small difference in thin film
response with the gamma slinger turned on and off at a distance
of 5 feet; 6 feet would probably be close to MDS. Figure 19 shows
a performance variation for the ASQ-81 at 45 feet that is at one time
discernible and at another time not discernible. At greater
distances up to 50 feet, no discernible signal occurred as there
were noise pulses which exceeded any possible signal by 10 db. At
this point, the ASQ-81 failed. As a result, the tests were
terminated because of adverse reliability effects on production
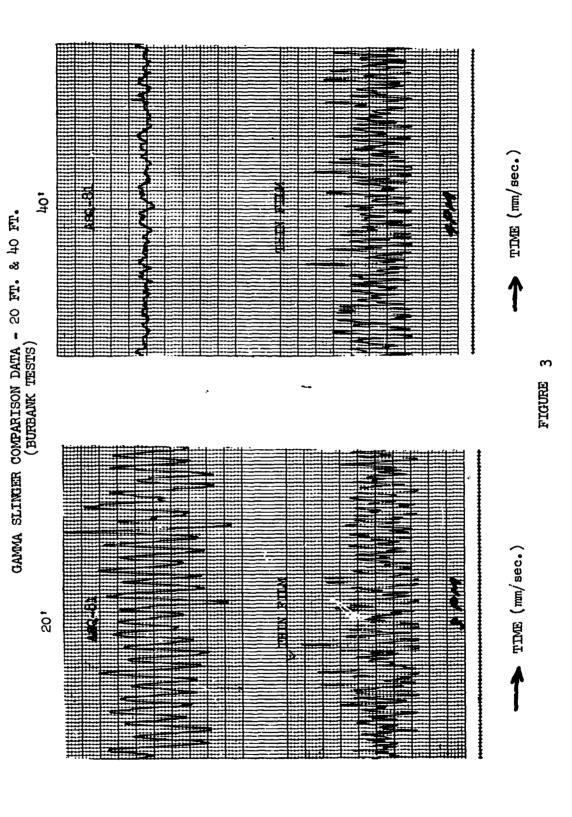testing. These data indicate a range ratio of $6/45 = 1$ to 7.5.

The effect of the gamma slinger target orientation with respect
to the thin film sensor in compass heading reference is shown in
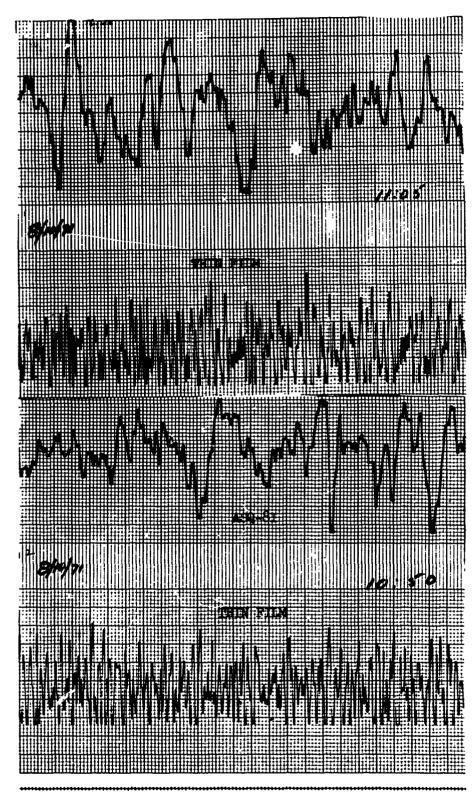Figures 20 and 21. From these data the conclusion can be drawn

LOCKHEED
CALIFORNIA COMPANY

GAMMA SLINGER COMPARISON DATA - 5 ft. & 10 ft.
(BURBANK TESTS)

FIGURE 2

7

LOCKHEED
CALIFORNIA COMPANY

GAMMA SLINGER COMPARISON DATA - 20 FT. & 40 FT.
(BURBANK TESTS)

FIGURE 3

LOCKHEED
CALIFORNIA COMPANY

8

ENVIRONMENTAL NOISE - MORNING

TIME (mm/sec.)

FIGURE 4

9
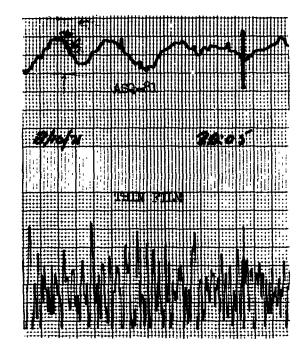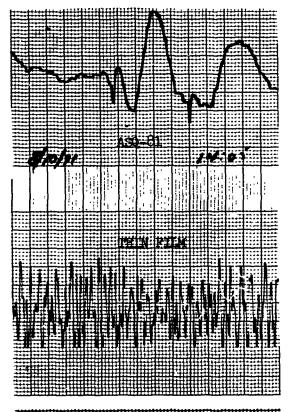
ENVIRONMENTAL NOISE - AFTERNOON & EVENING

TIME (mu/sec.)
FIGURE 5

10

LOCKHEED
CALIFORNIA COMPANY
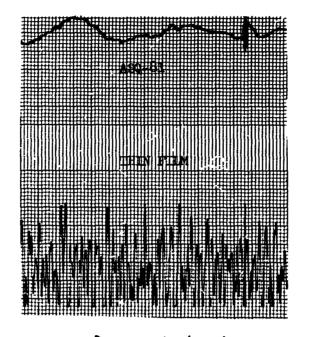
ENVIRONMENTAL NOISE – MORNING, NEAR GROUND

8-13-71

HEIGHT 3'6"

10:05 A.M.

TIME (mm/sec.)

8-13-71
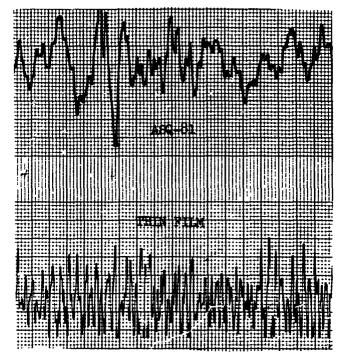
HEIGHT 3'6"

12:00

FIGURE 6

11

LOCKHEED
CALIFORNIA COMPANY
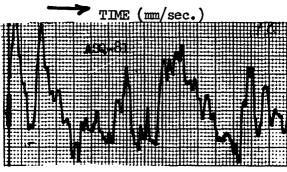
ENVIRONMENTAL NOISE - AFTERNOON, EVENING, NEAR GROUND

8-13-71

HEIGHT 3' 6"

16:30

TIME (mm/sec.)

8-13-71

HEIGHT 3' 6"

19:30

FIGURE 7

LOCKHEED
CALIFORNIA COMPANY
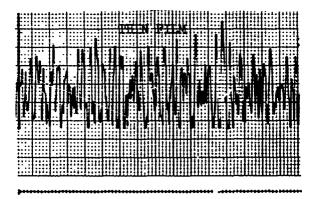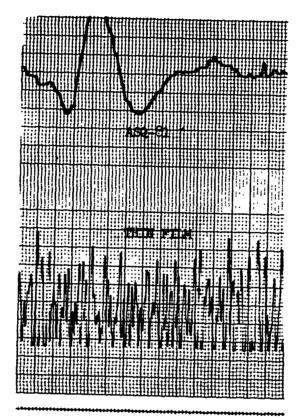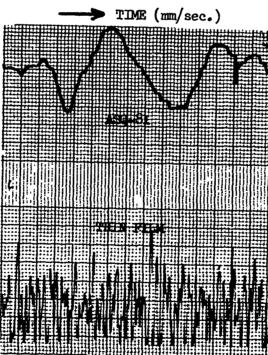
ENVIRONMENTAL NOISE - EVENING, ABOVE GROUND

8-13-71
HEIGHT 16'
19:45

→ TIME (mm/sec.)

8/13/71

19:50

FIGURE 8

13

LOCKHEED
CALIFORNIA COMPANY
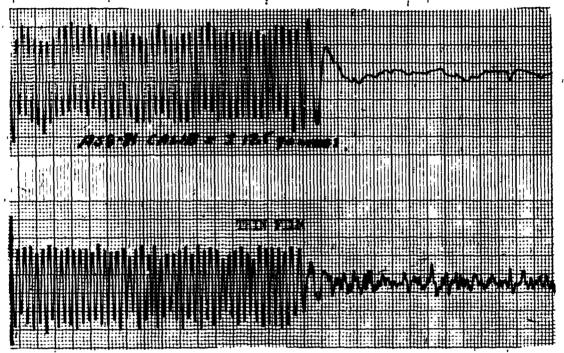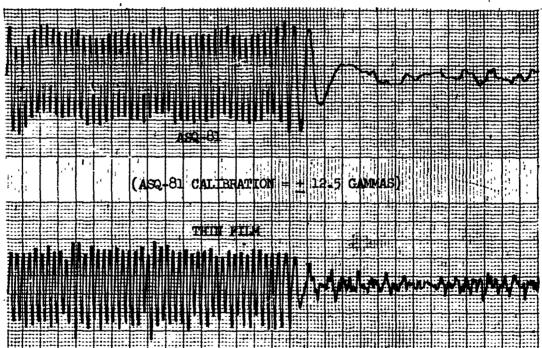
GAMMA SLINGER COMPARISON DATA - NEAR GROUND (BURBANK TESTS)

TIME (mm/sec.)

FIGURE 9

14

LOCKHEED
CALIFORNIA COMPANY
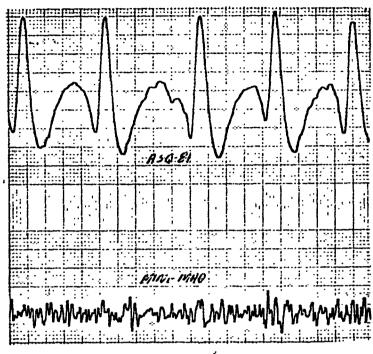
TRACK TEST COMPARISON DATA

FIGURE 10

LOCKHEED
CALIFORNIA COMPANY
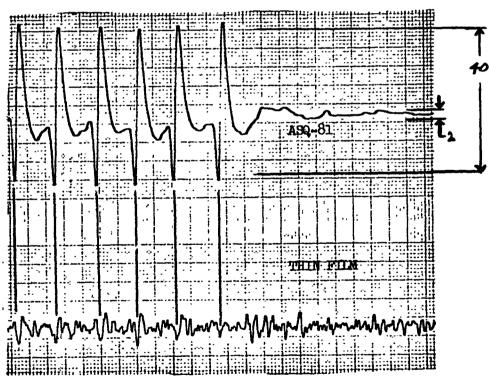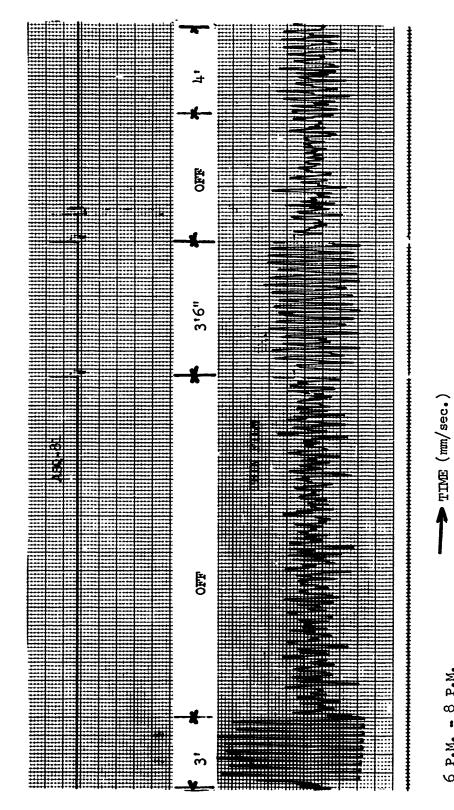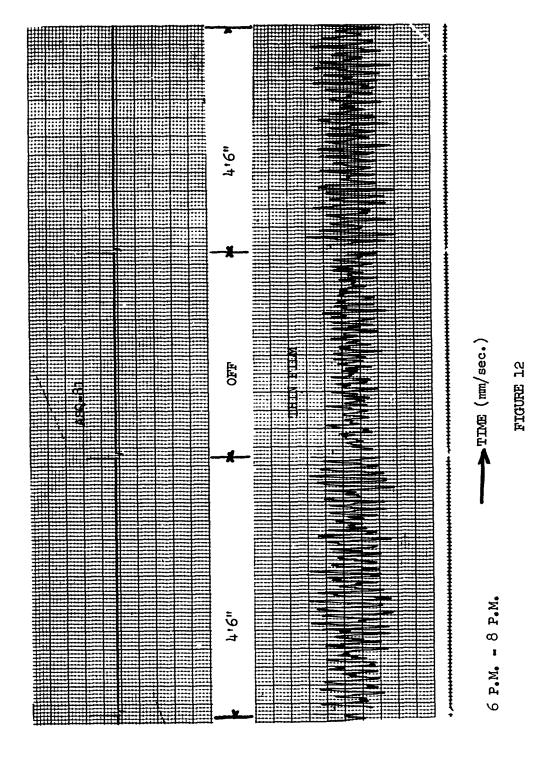
RYE CANYON NEAR GROUND TEST DATA
ASQ-81 & THIN FILM IN CLOSE PROXIMITY
GAMMA SLINGER - 3 FT TO 4 FT.

TIME (mm/sec.)
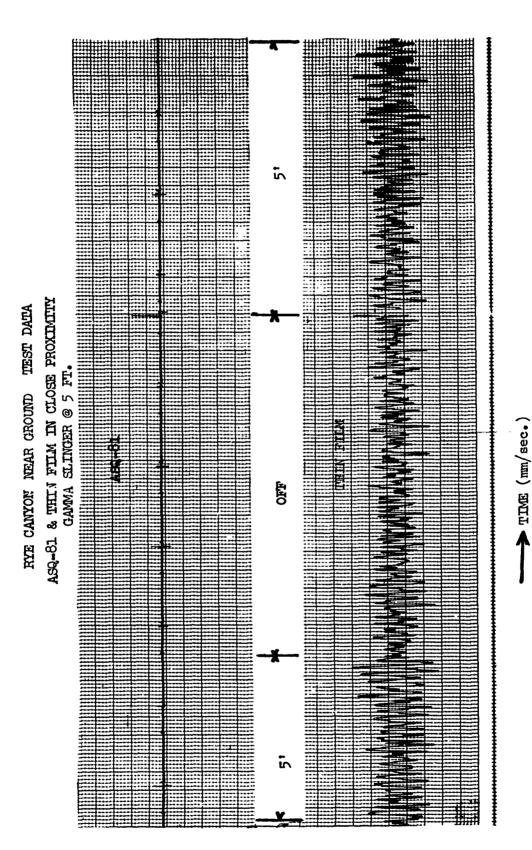
6 P.M. - 8 P.M.

FIGURE 11

RYE CANYON NEAR GROUND TEST DATA
ASQ-81 & THIN FILM IN CLOSE PROXIMITY
GAMMA SLINGER @ 4 FT. 6 IN.

FIGURE 12

6 P.M. - 8 P.M.

TIME (mm/sec.)

LOCKHEED
CALIFORNIA COMPANY

17

RYE CANYON NEAR GROUND TEST DATA

ASQ-81 & THIN FILM IN CLOSE PROXIMITY

GAMMA SLINGER @ 5 FT.

ASQ-81

5'

OFF

5'

THIN FILM

→ TIME (mm/sec.)

6 P.M. ~ 8 P.M.
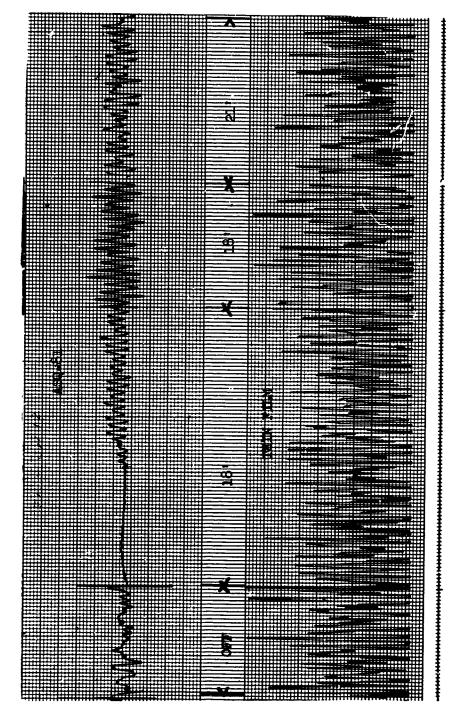
FIGURE 13

LOCKHEED
CALIFORNIA COMPANY
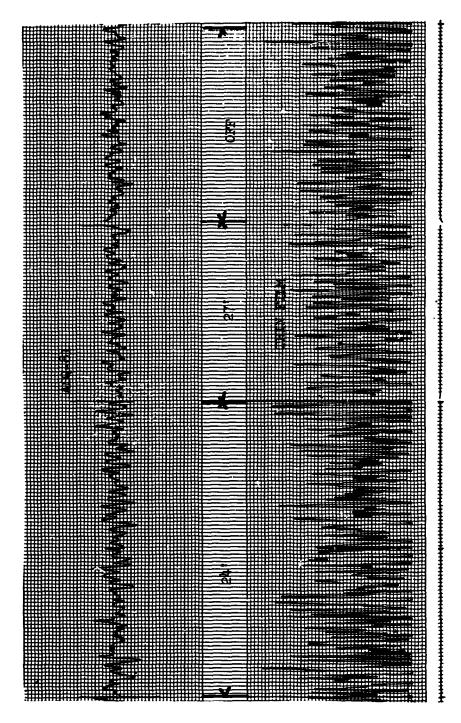
RYE CANYON NEAR GROUND TEST DATA
ASQ-81 & THIN FILM SEPARATED
GAMMA SLINGER @ 16 FT & 30 FT

TIME (mm/sec.)

FIGURE 14

8 P.M. - 11 P.M.

LOCKHEED
CALIFORNIA COMPANY

19

RYE CANYON - NEAR GROUND TEST DATA
GAMMA SLINGER @ 18 FT & 21 FT

TIME (mm/sec.)

FIGURE 15

8 P.M. - 11 P.M.

LOCKHEED
CALIFORNIA COMPANY

20

RYE CANYON NEAR GROUND TEST DATA
GAMMA SLINGER @ 24 FT & 27 FT
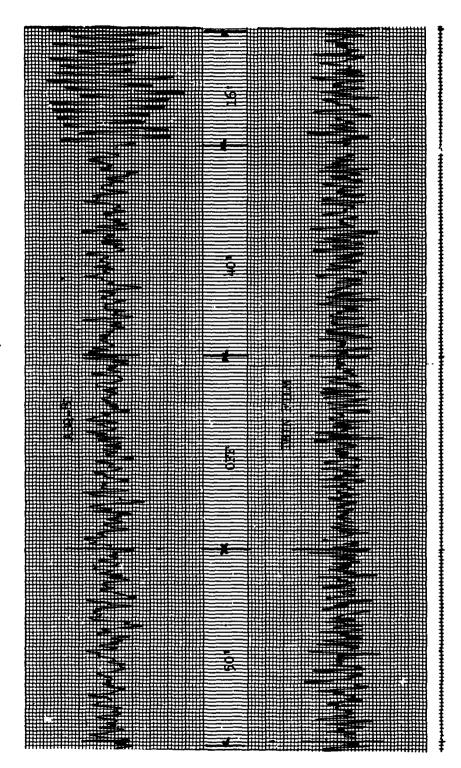
FIGURE 16

8 P.M. - 11 P.M.

21

RYE CANYON NEAR GROUND TEST DATA
GAMMA SLINGER @ 16 FT, 40 FT & 50 FT

FIGURE 17

8 P.M. - 11 P.M.

→ TIME (mm/sec.)

22

RYE CANYON BALLOON TEST DATA
GAMMA SLINGER 5FT AND LESS

TIME (mm/sec.)

FIGURE 18

2 P.M.   4 P.M.

23
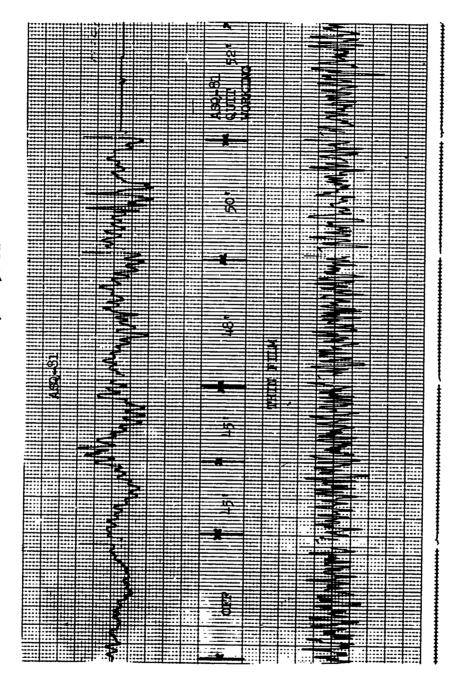
RYE CANYON BALLOON TEST DATA
GAMMA SLINGER - 45 FT-50 FT

TIME (mm/sec.)

FIGURE .19

2P.M./4P.M.

24
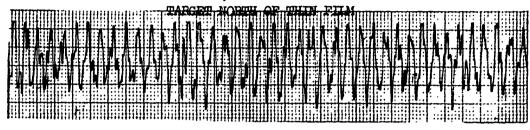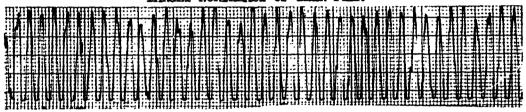
THIN FILM/TARGET ORIENTATION DATA
N. NE, E & SE
TARGET NORTH OF THIN FILM
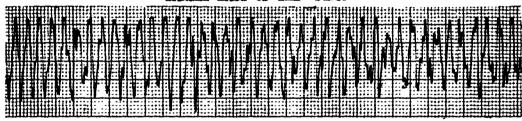
TARGET NORTHEAST OF THIN FILM
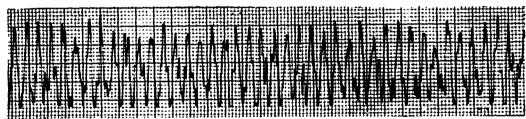
→ TIME (mm/sec.)

TARGET EAST OF THIN FILM
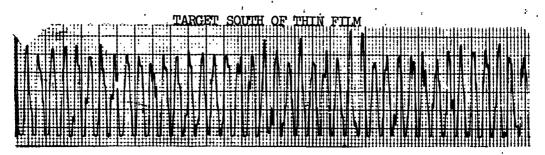
TARGET SOUTHEAST OF THIN FILM
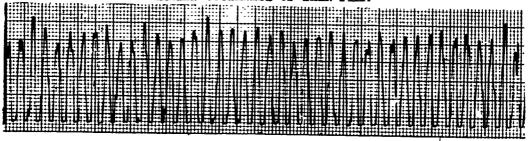
FIGURE 20
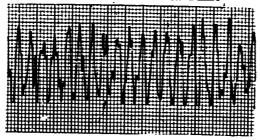
THIN FILM/TARGET ORIENTATION DATA

S, SW, W & NW

TARGET SOUTH OF THIN FILM
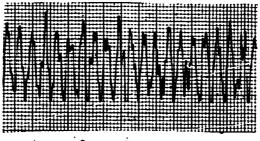
TARGET SOUTHWEST OF THIN FILM

TARGET WEST OF THIN FILM

TARGET NORTHWEST OF THIN FILM

→ TIME (mm/sec.)

FIGURE 21

that, in the area in which the tests were conducted, northeast
and 180° (or southwest) from that heading gives the most consistent,
smoothest and greatest amplitude signal. However, if further tests
of this nature were conducted in various geographical areas and
more points of the compass used a different conclusion might be
drawn. It should be noted though that most of the sensitivity
tests conducted under this contract were made with a N-S target
to sensor heading.

Substantial additional recorded sensitivity comparison data
acquired under this contract have been retained in Lockheed files
and is available for Office of Naval Research inspection and use.

LOCKHEED
CALIFORNIA COMPANY

ROD SENSOR POTENTIAL
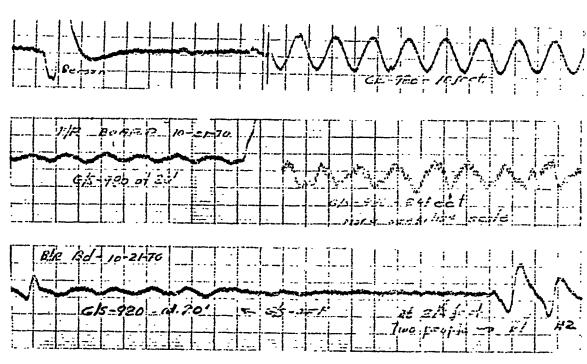
The following data and discussion considers the potential of
the rod sensor on the basis of the demonstrated detection
potential of the thin film approach when using a thin film square chip.
Figure 22 shows the results of tests conducted in the fall of
1970 (with the same gamma slinger target used in this contract
test program) indicating a high quality signal to noise ratio
(about 4/1) at a distance of 20 feet.

The magnetic cube law extrapolates this performance to a unity
(1/1) or MDS signal to noise ratio at a distance of 29 feet. This
compares favorably with the ASQ-81 data of Figures 2 and 3.
Achievement of similar performance with the presently used rod
sensor (compatible with the 3-axis sum/square concept) requires
incorporation of pump and bipolar detection improvements. As
an example, improved performance can be attained by replacement of
the present unshielded high impedance pump with a shielded low
impedance pump such as previously used.

LOCKHEED
CALIFORNIA COMPANY

SELF-PUMPED SQUARE CHIP DATA SAMPLES

(NO MOTION COMPENSATION)

→ TIME (mm/sec.)

NOTE: This performance was secured with a
high gain phase locked loop using
the original square chip thin film
rather than the rod type.

FIGURE 22

MOTION COMPENSATION 3-AXIS SUM/SQUARE DATA

General

The AN/ASA-65 three axis unit, each unit being exactly at 90° to each other, is utilized in the P-3C as a compensation device for the AN/ASQ-81 magnetometer system. It provides three independent orthogonal outputs which are individually applied to ASQ-81 compensation coils. In this research program, tests were conducted using this AN/ASA-65 for simplicity and demonstration of the proposed technique. The test point terminals for each of the three ASA-65 sensor legs were monitored and the resultant data plotted as a function of orientation angle in the earth's field. The sensor data was first obtained with one axis vertical and then skewed with no axis veritcal. The curves drawn in Figures 23 and 24 are derived from the data given in Figures 25 and 26.

Vertical Axis Data

Figure 23 illustrates very little vertical axis response to rotation and typical sin/cos response of the other two sensors. The square root of the sum of the individual squares (F) shows a maximum variation of 0.15 volts for 360° rotation while the individual sensors show a variation of 6.5 volts. Over certain angle increments - such as from 300° to 360° and 360° to 60°, (F) shows no discernible variation. It is believed that the use of sensor derivative coupling in sensor outputs would further reduce amplifier dynamic range by virtue of limiting sensor output to dynamic field changes.

LOCKHEED

30

3·-AXIS TEST DATA (ONE AXIS VERTICAL)

$$F = \sqrt{T^2 + L^2 + V^2}$$

V-Axis

T-Axis

L-Axis

Degrees

VOLTS

GRAPH OF VERTICAL AXIS SUM/SQUARE DATA

FIGURE 23

31

GRAPH OF 3-AXIS SKEW SUM/SQUARE DATA

FIGURE 24

3-AXIS CONCEPT VALIDATION

DATA (V-AXIS: VERTICAL)

DEGREES	V-AXIS	T-AXIS	L-AXIS
000	5.9	4.0	3.50
030	5.95	1.96	2.86
060	5.9	3.05	1.60
090	5.9	3.35	-0.10
120	5.9	2.70	-1.65
150	5.95	1.40	-2.75
180	5.9	- .30	-3.05
210	5.9	-1.85	-2.42
240	5.9	-2.95	-1.15
270	5.9	-3.20	0.60
300	5.95	-2.66	2.15
330	5.9	-1.30	3.20
360	5.9	0.40	3.50
000	5.9	0.40	3.5
030	5.9	1.96	2.85
060	5.94	3.05	1.61
120	5.95	3.35	0.05
150	5.96	2.78	1.65
180	5.97	1.40	2.75
210	5.98	0.25	3.06
240	5.99	1.80	2.40
270	5.98	2.97	1.15
300	5.97	3.20	0.55
360	5.94	1.30	3.20
370	5.90	0.40	3.50

Figure 25

LOCKHEED
CALIFORNIA COMPANY

3-AXIS CONCEPT VALIDATION
DATA (V-AXIS-SKEWED)

VOLTS

DEGREES	T-AXIS	L-AXIS	V-AXIS
000	6.10	1.98	1.98
030	6.26	2.30	0.30
060	5.85	3.20	1.12
090	4.60	4.20	1.85
120	3.45	5.42	1.72
150	2.25	6.15	0.75
180	1.45	6.25	0.75
210	1.30	6.15	2.35
240	1.84	5.27	3.78
270	2.85	4.15	4.50
300	4.10	3.00	4.20
330	5.25	2.25	3.40
360	6.10	1.98	1.90
000	6.10	1.98	1.98
030	6.20	2.30	0.30
060	5.85	3.19	1.13
090	4.58	4.20	1.86
120	3.50	5.40	1.71
150	2.25	6.17	0.75
180	1.46	6.25	0.78
210	1.33	6.15	2.33
240	1.85	5.25	3.80
270	2.85	4.14	4.50
300	4.12	4.14	4.50
330	5.30	2.27	3.40
360	6.10	1.98	1.98

Figure 26

3-Axis Skew Data

Figure 24 illustrates sin/cos orientation response for all three
sensors with amplitude variances up to 6.5 volts. The total
field calculation of (F) shows again about 0.15 volt variation
for 360° rotation. In this test, another set of data were taken
using derivative/capacity coupling of the individual sensors.
These data are given in Figure 27. In this derivative coupling
test, the ASA-65 was rotated and the response recorded after a
1-second delay. During the first half second after an incremental
change in angle, the individual sensors indicated a transient
response as shown which quickly reduced to zero.

LOCKHEED
CALIFORNIA COMPANY

3-AXIS DERIVATIVE COUPLING DATA

DEGREES	VOLTS*		
	T	L	V
000	0-(0.00)	0-(0.00)	0-(0.00)
030	0-(.030)	0-(0.50)	0-(-1.86)
060	0-(.270)	0-(0.99)	0-(-1.50)
090	0-(1.20)	0-(1.42)	0-(0.87)
120	0-(1.50)	0-(1.42)	0-(0.20)
15`	0-(1.40)	0-(0.98)	0-(1.20)
180	0-(0.86)	0-(0.35)	0-(1.70)
210	0-(0.30)	0-(-0.35)	0-(2.04)
240	0-(-0.55)	0-(-0.90)	0-(1.60)
270	0-(-1.15)	0-(-1.35)	0-(0.85)
300	0-(-1.40)	0-(-1.30)	0-(-0.15)
330	0-(-1.30)	0-(-0.96)	0-(-1.05)
360	0-(-0.90)	0-(-0.30)	0-(-1.60)

*PARENTHESIS DATA INDICATES "EYEBALL" ESTIMATE OF TRANSIENT
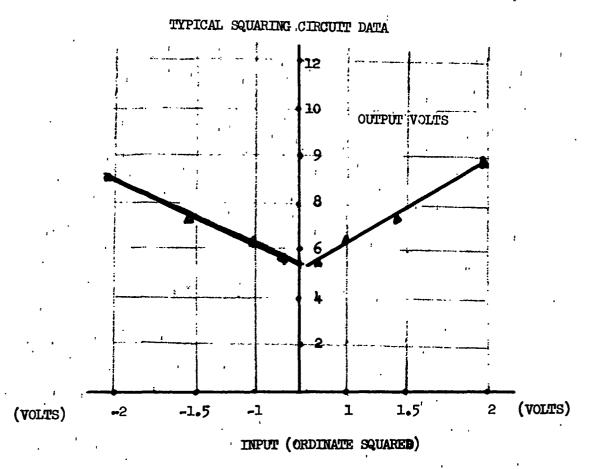RESPONSE TO ANGLE INCREMENTS OF 30 DEGREES

Figure 27

Squaring Circuit Development

As described in Reference (1) Lockheed has developed under
in-house Independent Research funding a low power electronic
squaring circuit. Figure 28 is a data plot of the squaring
circuit output versus input. A sine wave generator was used in con-
junction with a phase splitter to supply equal amplitude but
phase reversed inputs to both sides of the squaring circuit.
The load resistor output was a second harmonic sine wave whose
base level was nominally equal to one-half the supply voltage.
Thus, as the input varied, the D.C. mid-level of this second
harmonic varied and a capacitor between the output and ground
provided a filtered D.C. level which was monitored by a
Simpson 303 meter to observe the data plotted in the figure.
The phase inverter leads were reversed as shown by the plot to
check the squaring function for phase reversal characteristics.

The test results shown in Figure 28 support the conclusion that
not only is the sum/square concept solid but also that the sum/
square concept appears feasible from an initial research stand-
point. There are, however, limitations which relate to the
degree to which three squaring channels can be matched, as well
as the degree of 3-axis symmetry electronic and physical symmetry
which can be achieved. It should be noted that the variability
between solid state transistor and FET devices may pose a require-
ment for critical selective matching of components. For example,
the initial squaring circuit developed by Lockheed involved a high
component rejection rate. The problem of achieving 3-axis matching
may impose a 95% rejection rate unless uniform component production
can be achieved by tighter specifications. The Lockheed squaring
circuit requires relatively little power compared to typical
and commercially available squaring circuit modules.

LOCKHEED
CALIFORNIA COMPANY

TYPICAL SQUARING CIRCUIT DATA

FIGURE 28

LOCKHEED
CALIFORNIA COMPANY

DISCUSSIONS: RESULTS, PROBLEM AREAS AND SOLUTIONS

General

The results of this program indicate that the sum/square
function appears to lend itself to module development with
status of the art components. This module could be designed
to mate with either the ASA-65 or a 3-axis mini-rod configuration.
Rod sensor sensitivity can probably be increased significantly
by reduction of pump induced noise.

Sum/Square Research

Further effort in this area could be based upon use of
available squaring modules which generally require higher power
than the circuit developed by Lockheed. The Lockheed circuit
however has been based upon FET items which have a wide variance
in their electronic characteristics. It is an open question
at this time whether three matched squaring channels can be
better fabricated after conducting squaring circuit research
or with use of commercially available squaring circuits.
While this question is not completely resolved at this time,
Lockheed independent research indicates that the 3-axis sum/
square module can be assembled within status of the art
components provided selective utilization of components is
exercised. Such a sum/square module could be interfaced with
the AN/ASA-65 as an expedient approach.

Sensor Potential
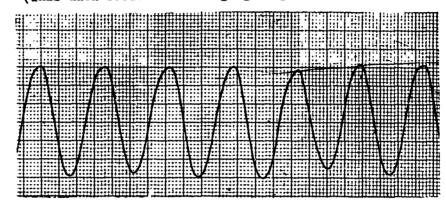
As indicated in the previous Figure 22 and the following Figure 29,
square chip performance exceeds by a wide margin the performance

SELF PUMPED THIN FILM DATA
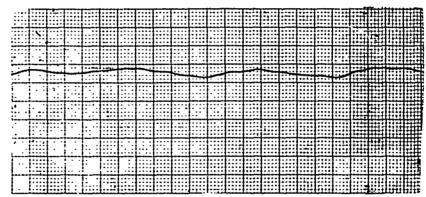
(This data secured with high gain phase locked loop.)

GAMMA
SLINGER ON
AT 10'
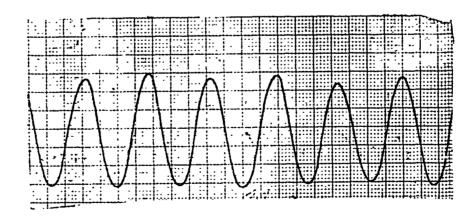
→ TIME (mm/sec.)

GAMMA
SLINGER
OFF

GAMMA
SLINGER
ON AT
10'

Figure 29

AUGUST 27, 1970   FIGURE 29

LOCKHEED
CALIFORNIA COMPANY

PUMP/SENSOR FEEDBACK
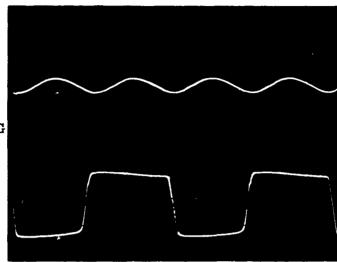
PUMP
OSCILLATOR
WAVEFORM
BEFORE SHORTING
OF SENSOR COIL

CORRELATOR
OUTPUT

PUMP
OSCILLATOR
WAVEFORM
WITH SENSOR
COIL SHORTED

CORRELATOR
OUTPUT

FIGURE 30

LOCKHEED
CALIFORNIA COMPANY

41

obtained by the rod sensor at this early stage of its development. (The data shown in Figure 29 was secured with the same gamma slinger target used in the other parts of this test program.) While these data were secured with a self-pumped square chip sensor, similar performance can be obtained with external pumping providing the pump phase reference is free of noise.
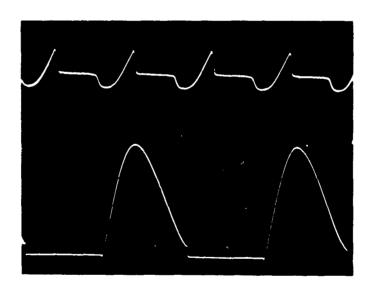
Noise Sources

In this first stage of rod sensor development, a high sensor drive level was used in order to increase the sensor response to a signal input. The sensor output was a high level unipolar pulse whose output at a relatively low impedance level exceeded the high impedance pump crystal oscillator output by about 30 db. In this first rod configuration, the unshielded high impedance low level output of the crystal oscillator was vulnerable to phase, amplitude, and frequency shifts due to temperature and sensor output feedback into the crystal oscillator. When either the sensor output or the oscillator output was shorted a substantial decrease in output noise level was observed. These observations indicate that the sensor and pump were not mutually independent. To test this further, the sensor coil was shorted out and a change was noted in the characteristics of the pump oscillator as indicated in Figure 30.

Rod Sensor Improvements

In earlier thin film externally pumped square chip compass work and in self-pumped square chip work, the pump action was at a relatively low impedance and therefore relatively independent
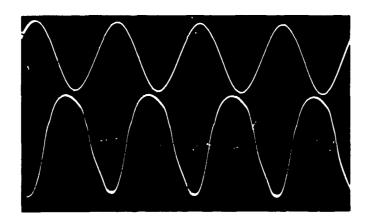
LOCKHEED

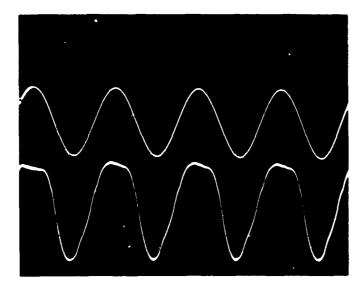BIPCLAR OUTPUT CHARACTERISTICS

REFERENCE

OUT OF PHASE
SENSOR OUTPUT

REFERENCE

IN PHASE
SENSOR OUTPUT

REFERENCE

TYPICAL
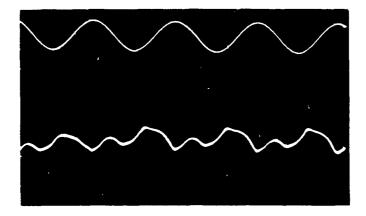SENSOR NULL
CHARACTER

FIGURE 31

LOCKHEED
CALIFORNIA COMPANY

43

of noise shifts due to sensor feedback temperature, capacity pickup, and other forms of environmental noise. In these more sensitive systems, the sensor output was a low level bipolar output as contrasted to the high level unipolar characteristic of the rod used in this 𝗑 ɔgram. Lockheed has in its own research, however, determined a rod circuit whose output characteristics (shown in Figure 31) provide the bipolar character- istic which has been symptomatic of high sensor performance. In this Figure 31, the lower photo represents a sensor null corresponding to a certain orientation angle. The two upper photos represent in phase and out of phase sensor outputs caused by displacing the sensor to either side of the null angle. It is believed this bipolar rod coupled with shielded low impedance pump excitation could provide both compass and 3-axis sum/square capability.

Sensor Performance Shifts

In previous self-pumped and externally pumped chip designs, the sensor was phase locked so as to provide displacement compensation. Thus, if such a sensor were rotated about its axis, a response would take place during the rotation; after the rotation, the sensor would automatically bias itself to the most sensitive portion of its detection characteristic. In this program, based upon the 3-axis sum/square concept, this feature was not used. Therefore, in these tests, a critical interface existed between sensor orientation angle and any phase shifts in the operating point of the high impedance pump oscillator. While this pump was crystal controlled, finger touch of the crystal case caused very large noise fluctuations in sensor output. Further, the specification for such high

LOCKHEED

impedance crystals indicate the need for critical temperature
stabilization. These considerations give reasons for some of the
fluctuations in the rod sensor performance during this program.
At this stage of research, the suitability and practicality of phase
locking each sensor in a 3-axis sensor configuration poses certain
factors; for example, the effect of such a design on the phased
sum/square operation is not known, could lead to alignment complexity,
and possibly increase system complexity. Further, it may be possible
that the 3-axis sum/square technique does not require such phase
locking to ensure maximum performance and it is possible that phase
locking would degrade performance.

Core Materials

Lockheed studies indicate that considerations should be given to
other materials and designs which may be superior to thin film
devices. For example, tests indicate that the Q of thin film
sensors normally used in compass and sensor research nominally
falls between 6 and 10. Reference (2) and other source material
indicate the possibility of securing a sensor Q as high as 140.

Total Field Sensor

The 3-axis total field concepts poses a dynamic range problem
associated with the squaring function requirement. This problem
requires a solution in order to achieve suitable sensitivity.
Lockheed initial analysis of this problem indicates that a practical
solution is available which provides sensitive linear detection
in a manner that is compatible with the 3-axis sum/square motion
compensation concept.

LOCKHEED
CALIFORNIA COMPANY

CONCLUSIONS

The results of this ONR sponsored program leads to the
conclusion that a 3-axis motion compensated low power mini-magnetic
sensor (Mini-Mad) appears feasible. Specific aspects of this
conclusion are as follows:

(1) A 3-axis Mini-Mad sum/square sensor system can be
assembled with available state of the art com-
ponents and materials.

(2) The ultimate sensitivity capabilities of the Mini-Mad
configuration cannot at this time be predicted
accurately. However, a 0.1 to 0.5 gamma sensitivity
level does appear achievable in a system.

(3) The sensitivity comparison tests of the rod thin
film versus the AN/ASQ-81 showed the ASQ-81 to be
far superior in all noise environments in which
the tests were conducted. Range comparisons of
1/4, 1/2.7, 1/4, 1/7.5 in the various type tests
conducted indicates that a nominal 1 to 4 ratio
was demonstrated for the rod sensor.

(4) The sensitivity tests conducted on the square chip
thin film showed a gamma slinger pickup at 29 feet range
versus a maximum of 45 feet for the ASQ-81 tested at
a different time and environment. This gives a range
ratio of 1 to 1.55. There is no reason to believe that
this same capability cannot be achieved in the rod
sensor.

LOCKHEED

RECOMMENDATIONS

Further advancement of a motion compensated Mini-Mad sensor system should include further 3-axis sensor research along with sensor element considerations. In addition, the scope of the research program should include the total field sensor concept. The following specific areas are recommended for further effort:

(1)   Conduct literature search, historical and contemporary work that may constructively apply to motion compensated Mini-Mad feasibility.

(2)   Derive and test a "quick reaction" total concept model by fabrication of a sum/square module which mates with the 3-axis ASA-65 rod system.

(3)   Investigate by analysis, research and tests the sensor detection potential and refine mini-rod sensor, other sensor elements and related circuits for improved sensitivity and noise reduction.

(4)   Conduct analysis of design requirements to meet dynamic range requirements for 3-axis sum/square function.

(5)   Conduct research and analysis on the total field sensor approach.

(6)   Generate a total program plan for Mini-Mad systems that puts into perspective the technical, research, development, and operational requirements for advancement of Mini-Mad systems. This plan should include the following tasks:

MOTION COMPENSATED MINI-MAD
PROGRAM TASKS

Research	Applied Research	Development
Operational Analysis	Sensor Circuits	Sum/Square Module
Sensitivity Analysis	3-Axis Sensor	Amplifier/Filter
	Construction	Systems
Application Study	Signal Processing	Correlator Circuits
Communication Interfaces	Sensor Drive Techniques	Pump Drive Circuits
Environmental Limitations	Core Winding Techniques	Filter Circuits
(Temperatures, Shock,	Core Materials	
etc.)		
MAD Signal Study	Total Field Sensor	
Aircraft Noise		
Solar/Global Noise		

LOCKHEED

48

BIBLIOGRAPHY REFERENCES

1. <u>Mini-Magnetometer Motion Compensation</u>, Lockheed Report No. 24530, 14 May 1971.

2. <u>Principles of Radio Engineering by Glasgow</u>, McGraw Hill, 1936

LOCKHEED
CALIFORNIA COMPANY

APPENDIX A
FACILITY/TEST PHOTOGRAPHS

This appendix consists of photographs of the Lockheed Rye Canyon Research Center Magnetics and Burbank test facilities used in this program other than illustrated in Figure 1.

Figure A-1: a pressured balloon non-magnetic material facility at Rye Canyon. This facility houses the equipment and fixtures used in AN/ASQ-81 and other MAD and compensation system testing programs. Remote control of equipment is exercised in the companion facility shown in Figure A-2.

Figure A-2: Rye Canyon test and control building. This facility not only houses the control equipment for the balloon facility, but also houses other recording and test equipment for MAD R & D.

Figure A-3: This interior view of the balloon test facility shows the AN/ASQ-81 installed in the maneuver cradle fixture with the Mini-Mad sensor near the ASQ-81 sensor head.

Figure A-4: This photo illustrates the Burbank submarine model target track facility and gamma slinger located in the foreground with the ASQ-81 and thin film sensor in the background.

Figure A-5: This closeup photo of the target track shows a pipe target on the movable dolly and the drive motor in the foreground.
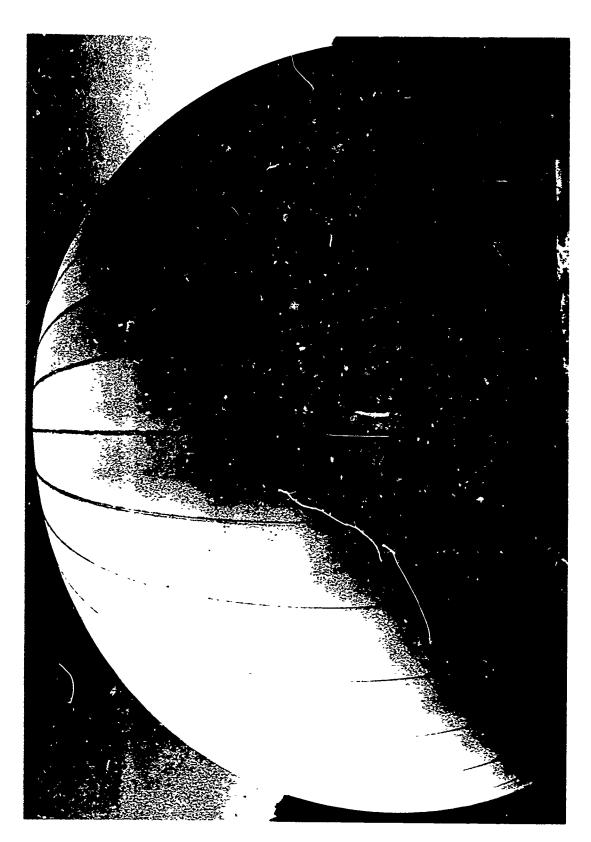
LOCKHEED
CALIFORNIA COMPANY

A-1

FIGURE A-1 EXTERIOR - RYE CANYON BALLOON MAGNETICS TEST FACILITY

LOCKHEED
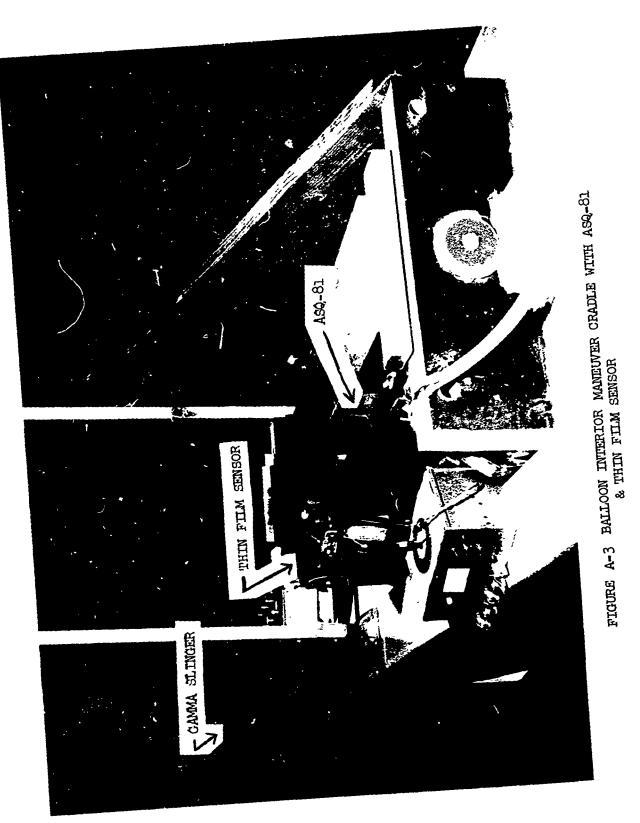
FIGURE A-2. MAGNETICS TEST AND CONTROL BUILDING (RYE CANYON TEST FACILITY)

FIGURE A-3 BALLOON INTERIOR MANEUVER CRADLE WITH ASQ-81
& THIN FILM SENSOR

LOCKHEED

THIN FILM
SENSOR

AN/ASQ-81

MODEL TEST TRACK

GAMMA SLINGER

FIGURE A-4 MODEL TARGET TRACK (BURBANK TEST FACILITY)

LOCKHEED
CALIFORNIA COMPANY

A-5